

# ALTAIR<sup>®</sup> DUALAIR<sup>™</sup>

Secondary Glazed Louvre Component System



*breezway*<sup>®</sup>

# Dualair™ System

## High Performance Glazing



The Altair® Dualair™ Louvre Component System is a secondary glazed unit with sophisticated aesthetics and reduced installation costs making it ideal for apartment or school projects, particularly those with High Rw or Low U-value requirements.

### Improved Performance for Commercial Designs

Breezway's new Altair Dualair Component System has been carefully designed to deliver a high performance dual glazed louvre system to the commercial market.

The system provides outstanding results for improved water penetration, allowing larger window sizes to be installed into project designs. Through the use of two louvre galleries inside the one frame, significant sound reduction can be achieved as well as excellent ventilation and shading to keep buildings cool and comfortable.

The secondary glazed Dualair System provides good thermal insulation comparable to that of high performance double glazing in thermally broken framing, thus making the system ideal for projects with high Rw or low U-value requirements.



#### WATER PENETRATION

Significantly improved water penetration resistance - Up to 620Pa Water Penetration Resistance at floor to ceiling window sizes.



#### MAXIMUM VENTILATION

Maximum ventilation to keep building occupants comfortable.



#### ACOUSTIC INSULATION

Excellent sound acoustics to reduce outdoor noise - Rw ratings up to 38.



#### THERMAL INSULATION

U-values ranging from 2.4 to 3.3 give comparable performance to double glazed windows with thermally broken frames.



#### AESTHETICS

Single window unit gives better aesthetics. Using aluminium or patterned blades can create a decorative effect to the building facade.



#### SHADING / PRIVACY

Use aluminium or patterned glass blades on outer blades to provide shading and privacy.



#### INSTALLATION COSTS

Single window unit reduces installation costs.

### Product Offer


- Compatible with the Alspec® McArthur Evo™ and Alspec Hunter Evo™ Acoustic 150mm Framing Systems. (Note: some alternate processing to the Alspec framing is required)
- The outer gallery must always be an Altair Powerlouvre™ Gallery, the inner gallery can be a Powerlouvre Gallery or manually operated.
- Standard heights only.
- 6mm thick, 152mm glass or aluminium blades only.
- Full range of colour and handle customising options available.
- Fully compatible with the Stronghold® System with restricted openings to satisfy Fall Prevention requirements.

### Extensive Testing

A number of tests have been completed for the Dualair System with more to come in the near future.

Please visit [www.breezway.com.au/dualair](http://www.breezway.com.au/dualair) for up to date test results as they become available.

Head detail of two Altair® Louvre Galleries in 150mm Commercial Frame.

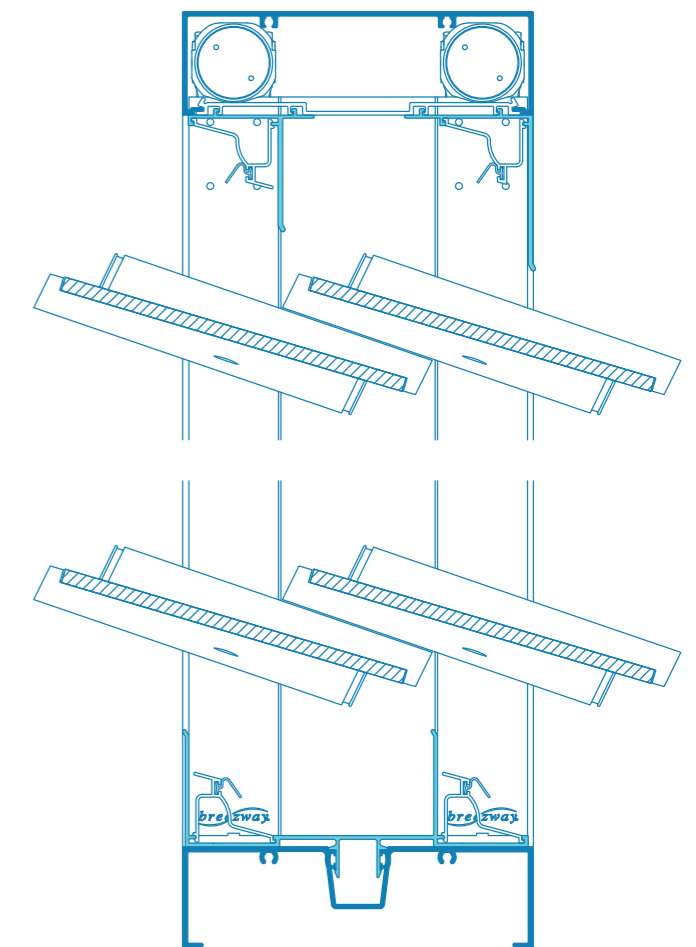

Sill detail of two Altair® Louvre Galleries in 150mm Commercial Frame.



### Australia

Breezway Head Office  
35 Cambridge Street  
Coorparoo QLD 4151  
ABN 24 081 897 823  
Telephone: +61 7 3847 0500  
1800 777 758 (from within Australia)  
Facsimile: +61 7 3397 8643  
Email: sales@breezway.com.au

### Darwin Service Centre

Rear building #5, 31 Albatross Street  
Winnellie NT 0821  
Telephone: +61 8 8947 3570  
Facsimile: +61 8 8947 3571

### Perth Service Centre

1/18 Colin Jamieson Drive  
Welshpool WA 6106  
Telephone: +61 8 9458 4884  
Facsimile: +61 8 9458 8872

### Malaysia

No. 39 Jalan Wawasan 3/KU 7  
Sungai Kapar Indah  
42200 Klang  
Selangor Darul Ehsan  
Malaysia  
# 601783-T  
Telephone: +60 3 3291 4885  
Facsimile: +60 3 3291 9887  
Email: malaysiasales@breezway.com

### Hawaii

99-1451 Koaha Place, Suite 1  
AIEA, Hawaii 96701  
Telephone: +1 808 484 5999  
Facsimile: +1 808 484 5959  
Email: hawaii@breezway.com



Your Breezway Louvre  
Preferred Dealer.

## Dualair™ Window System Heights for 152mm Blade

No. of Blades	Height <sup>1</sup>	Height <sup>2</sup>	Height <sup>3</sup>
All dimensions are in millimeters (mm)			
2	418	423	328
3	558	563	468
4	698	703	608
5	838	843	748
6	978	983	888
7	1118	1123	1028
8	1258	1263	1168
9	1398	1403	1308
10	1538	1543	1448
11	1678	1683	1588
12	1818	1823	1728
13	1958	1963	1868
14	2098	2103	2008
15	2238	2243	2148
16	2378	2383	2288
17	2518	2523	2428
18	2658	2663	2568

The Dualair System can be configured to either maximise the Rw rating or Water Penetration Resistance rating.

- Head:** Aspec McArthur Evo  
**Sill / Transom:** Aspec McArthur Evo
- Head:** Aspec McArthur Evo  
**Sill / Transom:** Aspec Hunter Evo Acoustic
- Daylight Opening Height**

